

PERKO® Cat. No. 0616 Series L.E.D. Side Lights

Patent Pending

These lights are designed for use on the following:

Stealth I Series: 1nm visibility. For use on power driven vessels under 12 meters (39.4 ft.) in length operating on a nominal 12 volt system.

Stealth II Series: 2nm visibility. For use on power driven vessels under 20 meters (65.6 ft.) in length operating on a nominal 12 volt system.

In order to comply with '72 COLREGS and the U.S. Inland Rules, the following must be adhered to:


MOUNTING INFORMATION

Read all instructions before proceeding

- 1). For proper light selection, positioning and configuration, refer to the A.B.Y.C. Standard A-16*, the '72 COLREGS* and the U.S. Inland Rules*.
- 2). For installations on conductive surfaces (such as aluminum boats), a gasket set (Perko Cat. No. 0616000GKT) is available to insure isolation of the fixture and minimize stray current corrosion. Refer to instructions included with the gasket set for additional mounting details.
- 3). These lights are designed to be mounted on a horizontal surface.
- 4). Draw a 6 inch long reference line through the center of the selected mounting location and parallel to the centerline of the boat.
- 5). Cut out the mounting template. Place it on the mounting surface such that the reference line (drawn above) is directly underneath the reference line marked on the template.
- 6). Drill 2 holes through the template to accommodate #8 pan head mounting screws. Drill a 5/16 inch hole (or 7/16 inch hole if gasket set is installed) to accommodate the electric wiring.
- 7). Identify the light based upon position of the lens to assure the light will be mounted on the correct side of the boat.
- 8). Attach supply connections to the light, making sure to wire in accordance with both A.B.Y.C. Standard E-9* and U.S. Coast Guard Safety Standards for Boat Electrical Systems (33 CFR 183)*. **Observe polarity.**
- 9). Mount the lights in accordance with the template.
- 10). These lights use L.E.D.'s and therefore are not serviceable. Do not attempt to open the lens.


* The above referenced Standards can be obtained from:

- 1) American Boat and Yacht Council, Inc
- 2) U.S. Coast Guard
613 Third Street, Suite 10
Washington, D.C. 20593
(or your local C.G. Office)



TEMPLATE

Drill 5/16" hole
for Electric Wiring
(7/16" hole if gasket
set is installed)

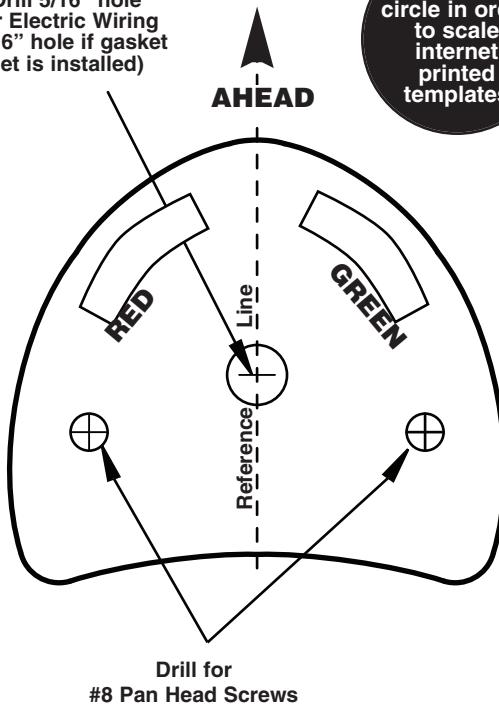

This is a 1" circle in order to scale internet printed templates

Perko Cat. Nos:

Stealth I Series: 1nm

0616000STS, 0616DP0STS
0616000BLK, 0616DP0BLK
0616000WHT, 0616DP0WHT

Stealth II Series: 2nm

0616002STS, 0616DP2STS
0616002BLK, 0616DP2BLK
0616002WHT, 0616DP2WHT