

# PERKO®


Cat. No. 0960000CHR Latch Set  
Cat. No. 0960DP0CHR Latch Set

**MOUNTING INSTRUCTIONS**  
**READ ALL INSTRUCTIONS BEFORE PROCEEDING.**

This mortise latch set is designed to be mounted on doors 1 inch to 1-3/8 inches thick. The bevel (strike) is reversible.  
See exploded view on reverse side.

- 1). Cut out templates below.
- 2). Tape template (1) on edge of door at desired height. Align appropriate lines with the edge of the door and fold over edge.
- 3). Tape template (2) on side of door, lining up the center lines of the holes with the adjacent lines on template (1) Mark cut-outs for mortised latch body and escutcheon plate holes.
- 4). Cut out door and drill holes as indicated (Note cutting dimensions on diagram on reverse side).
- 5). Insert latch set body in edge of door and fasten with #6 mounting screws (not supplied).
- 6). Fasten escutcheon plates as shown on reverse side with #6 mounting screws (not supplied). Insert lever "L" handle with shaft through square hole in cam. Screw knob onto shaft and tighten set screw.
- 7). Use installed latch to locate correct position and mount strike on door frame.

PERKO, INC  
16490 N. W. 13th Avenue  
Miami FL 33169-5707  
[www.perko.com](http://www.perko.com)

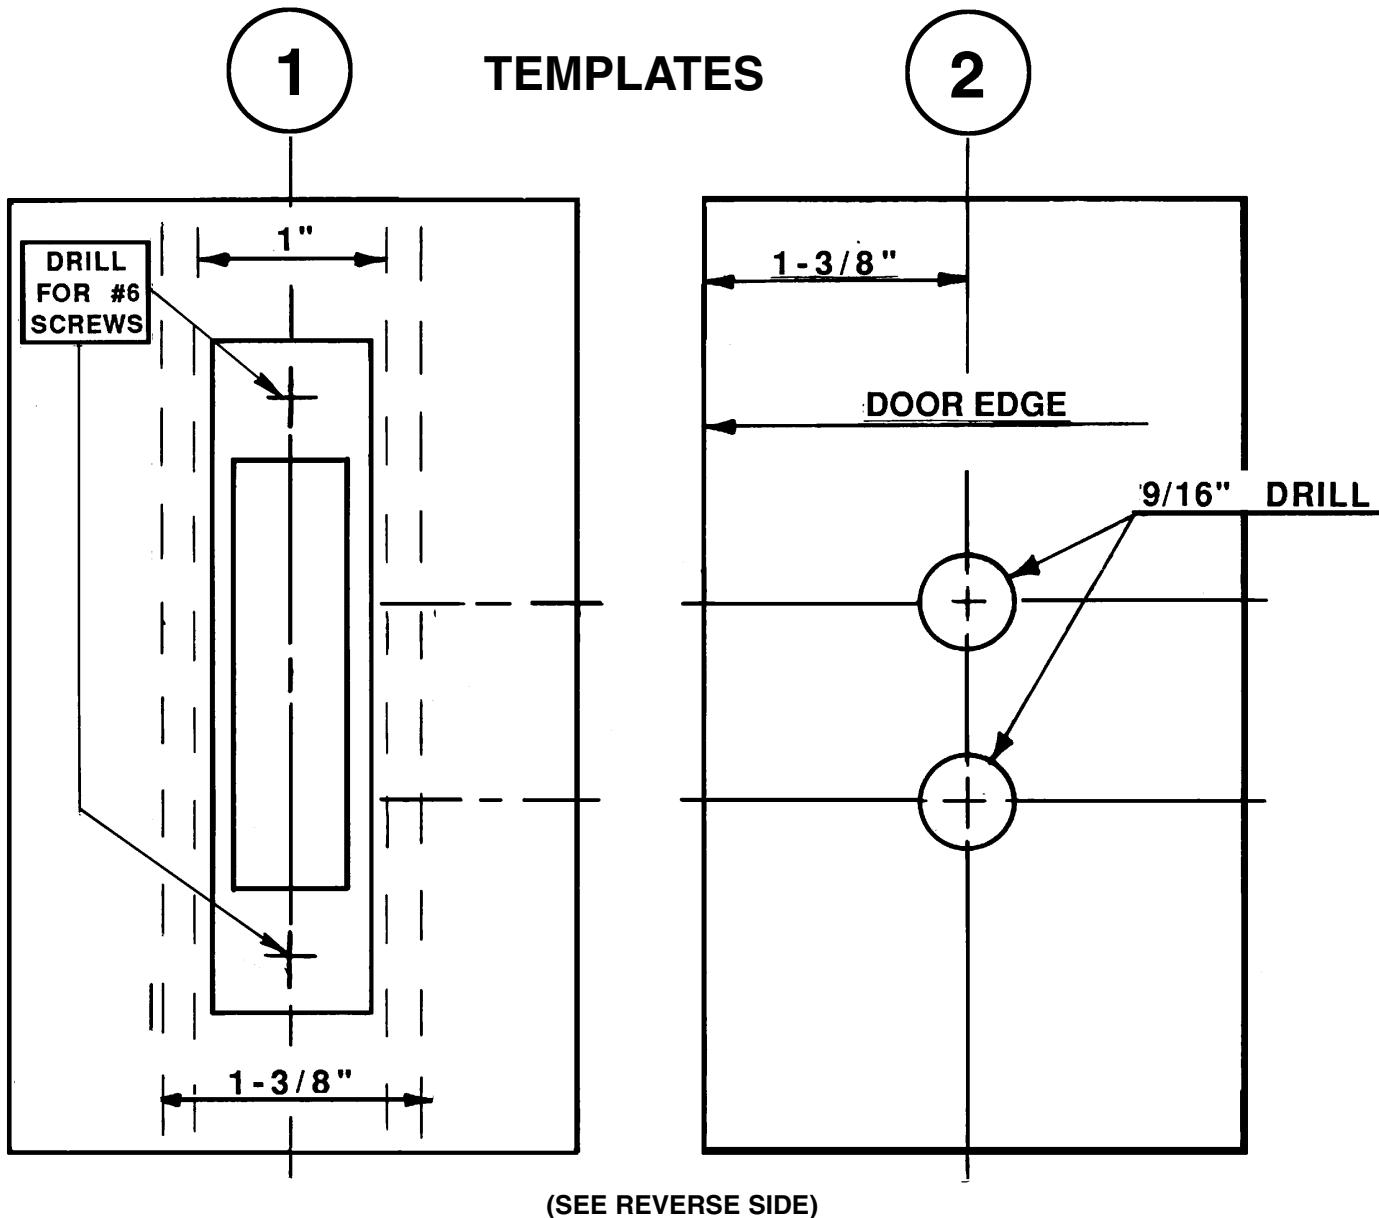

**EXPLODED VIEW**  
**CAT. NO. 0960000CHR LATCH SET**




SHAFT

ESCUTCHEON PLATE  
 ("L" HANDLE SIDE)


REPLACEMENT PARTS	
ITEM	CATALOG NUMBER
COMPLETE LATCH SET	0960000CHR
KNOB "L" HANDLE AND SHAFT ASSEMBLY	0962000CHR
ESCUTCHEON PLATE FOR "L" HANDLE SIDE	092800008A
ESCUTCHEON PLATE FOR KNOB SIDE	092700008A
"T" HANDLE WITH COTTER PIN	09600009A
BEVEL WITH CAM (STRIKE)	(NOT SHOWN)
STRIKE PLATE ONLY	0912000CHR

CAM


LATCH BODY SET  
 NOTE DEPTH DIMENSIONS




ALL MOUNTING SCREWS  
 ARE #6 SIZE  
 (NOT SUPPLIED)

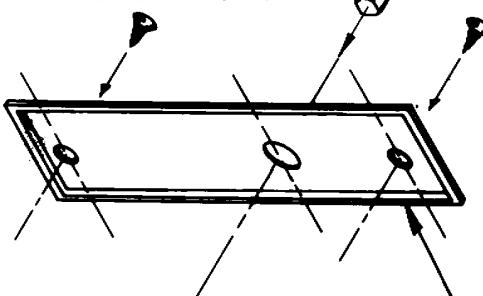


ESCUTCHEON PLATE  
 (KNOB SIDE)

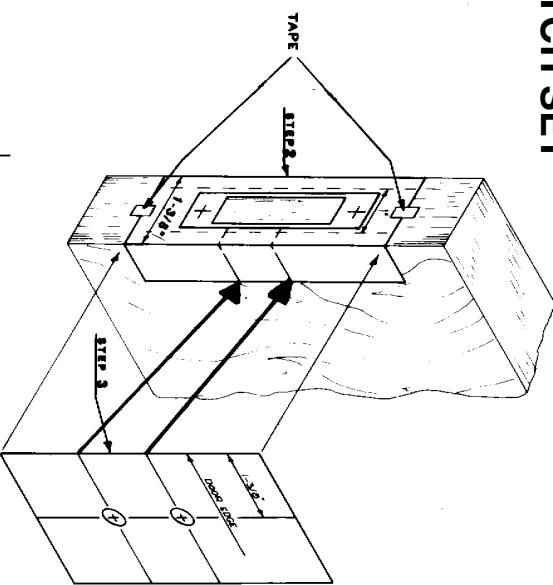

"T" HANDLE

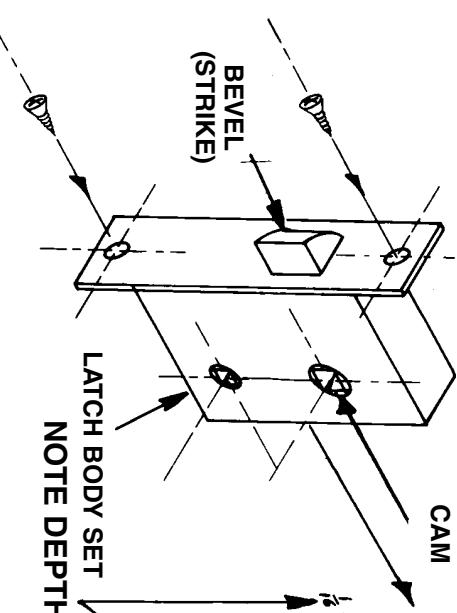

BEVEL  
 (STRIKE)

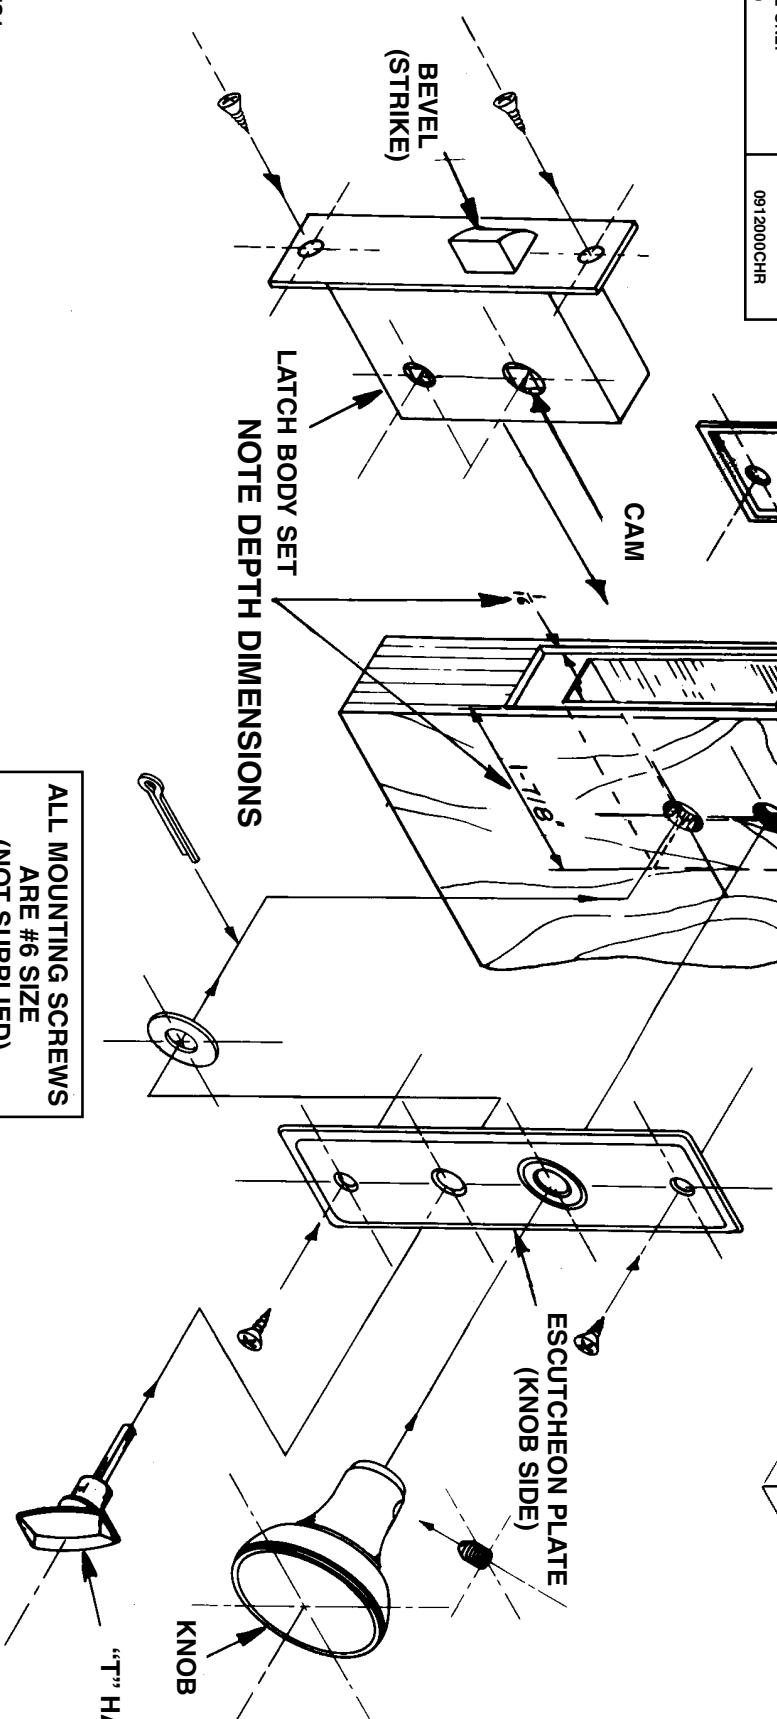

LEVER  
 "L" HANDLE