

REVISION HISTORY					
REV	DATE	BY	DESCRIPTION		
Α	27NOV2014	DMS/YGC	PRN: P2014-2423		



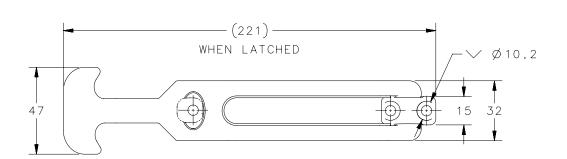

SCALE 1:4

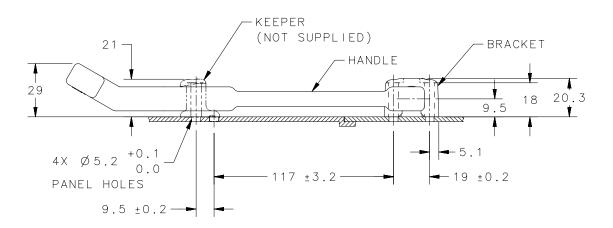

NOTES:

- 1. MOUNT USING(3) M5 (NO.10), SCREWS OR Ø5(3/16) RIVETS (NOT SUPPLIED).
- 2. NOTED DIMENSIONS ARE NOT TO SCALE AND REPRESENT DISTANCE WHEN FLEXIBLE DRAW LATCH HANDLE IS STRETCHED TO LATCHED POSITION OVER THE KEEPER.

2	– .	1	HANDLE	T.P.E.	BLACK
1	-	1	BRACKET	G.R. NYLON	BLACK
-	F7-730	-	LATCH SUBASSEMBLY	_	_
NO.	PART NUMBER	QTY	TYPE OF COMPONENT	MATERIAL	FINISH

5		THIRD ANGLE PROJECTION	southco
Εŀ		INCHES [MM]	CONNECT · CREATE · INNOVATE
	SURFACE AREA	TOLERANCES UNLESS OTHERWISE NOTED	DESCRIPTION NUMBER F7 FLEXIBLE Draw Latch
	VOLUME	ALL DIMENSIONS WITHOUT TOLERANCES ARE FOR	FRONT MOUNTING
	PROPRIETARY ITEM	REFERENCE ONLY.	A NX DWG NO. J-F7-730
	IN WRITING, INFORMATION DISCLOSED HEREON IS CONFIDENTIAL AND ALL RIGHTS, PATENT AND OTHERWISE, ARE RESERVED BY SOUTHCO, INC.	PER ASME Y14.5M-1994	DMS/YGC DATE 27NOV2014 SCALE 1:2 SHEET 1 OF 1
		^	