



# PANTHER™

To use your Panther “Happy Hooker” follow these easy instructions:


1. Attach line to eye of link with a simple stop knot:

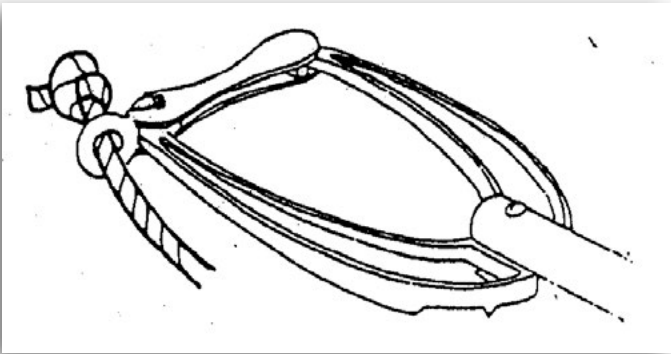

2. Push the “Happy Hooker” forward to straddle eye:

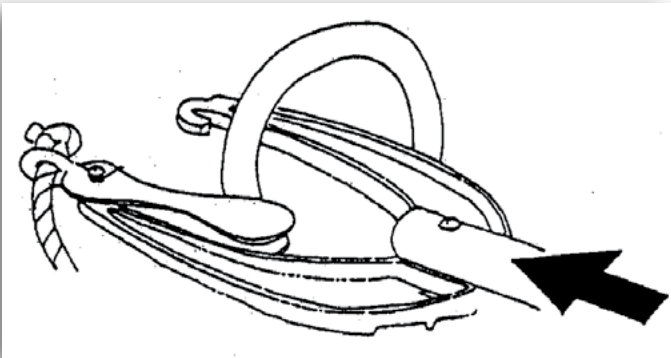

3. Pull the “Happy Hooker” back:

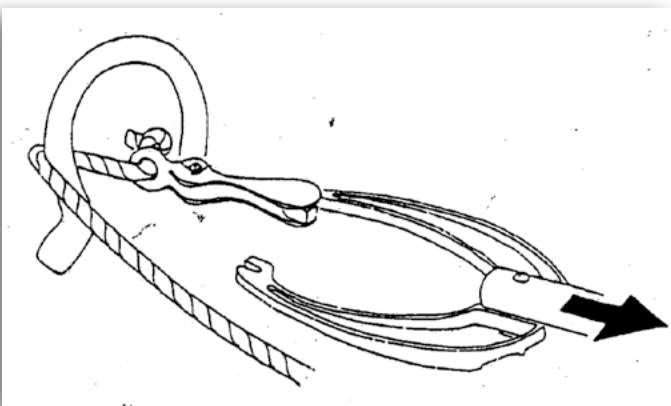


## Connecting the Panther “Happy Hooker” to a pole:

The “Happy Hooker” can be easily connected to any pole by the use of a 1/4” bolt or hose clamp. (pole not included)

### Bolt Connection:

Drill a 1/4” hole through pole using the “Happy Hooker” fork as a guide. Pass bolt thru pole, fit “Happy Hooker” and secure with wing nut. Cut off any surplus length of bolt.

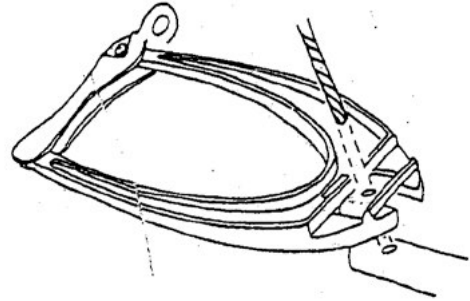


By removal of wing nut “Happy Hooker” can be turned over to be refitted at right angles to pole to facilitate the engagement of a ring with a limited clearance behind it.

### Clamp Connection:

*Important in cases of sealed buoyant metal or telescopic poles*

The “Happy Hooker” can be fixed with a standard 1/2” wide worm drive hose clamp passed thru the slots provided in either of the two alternative positions.

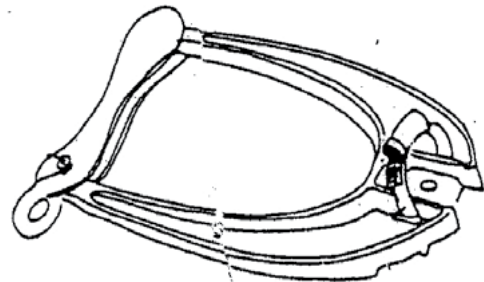

## ”Panther “Happy Hooker” NOTES:

The “Happy Hooker” has a built in locking system to prevent accidental detachment of the link. If the link appears to lock , it can be freed instantly by applying pressure to the eye towards the normal handle position. i.e. as would be applied by the line in instruction.

If it is desired to remove or refit the link, this may be carried out by distorting one of the fork arms sideways.

**CMP** 

1.604.940.2010 | [sales@cmpgroup.net](mailto:sales@cmpgroup.net)

P/N: 85-B203MAR  
P/N: 85-B203STN