



★ FEATURES

- 3 Optic Zones - Scene, Driving, Spot
- Seamless Beam Transition
- Slow, Moderate & High-Speed Beam Patterns
- 9-36 VDC
- Operating Temp -40F to + 145F/-40C to +60C
- Two Layers of Adaptive Response
- Active Power Management System - Power Capacity Sensing
- Active View Technology - Internal GPS Module
- Use In Adapt Mode Or All On
- Limited Lifetime Warranty
- Alloy Housing and Heatsink
- Impact Resistant Polycarbonate Lens
- Durable UV Polyester Powder Coat
- Pressure Equalizing Vent
- Black Exposed Printed Circuit Board
- Patented Optics
- 50,000 Hr+ LED Lifespan
- Off Road Use Only
- Fits Most Off-Road Motorcycles
- Magnetic Reed Power Clip

📦 KIT INCLUDES

- Mounting Bracket and Hardware
- Amber Light Cover
- Number Plate
- Wire Harness and 3 Position Switch




☰ SPECIFICATIONS

PART NUMBER	KIT	WT (LBS.)	AMP DRAW @ 14V DC MIN / MAX	WATTS	LEDS	*RAW LUMENS
300416	Ready to Ride Kit White	4	1.786 / 5.643	25 / 79	14	2,992 / 8,786
300417	Ready to Ride Kit Black	4	1.786 / 5.643	25 / 79	14	2,992 / 8,786

* Raw Lumens is based on LED manufacturer specifications. **Distance with .25 lux and Peak Beam Intensity are tested using ANSI/NEMA FL standards.

📏 DIMENSIONS

ADAPT XE	A	B	C
Dimensions	5.12"	5.37"	3.65"

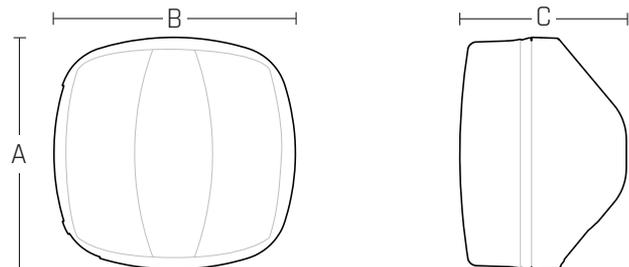

📊 BEAM PATTERNS

- Zone 1: Scene Beam Pattern
- Zone 2: Drive Beam Pattern
- Zone 3: Spot Beam Pattern

