

SEAVIEW

ELEVATE YOUR ELECTRONICS



INSTALLATION INSTRUCTIONS

For Seaview Light Bar Tops:

LTCU, LTCUSS

Refer to website for most up to
date instructions and videos.

WWW.SEAVIEWGLOBAL.COM

PARTS INCLUDED



x1




x2

TOOLS NEEDED




Sudbury Elastomeric Marine Sealant is recommended. To purchase call 800-655-7922 or visit www.seaviewglobal.com

-
- 1 Route the cables through the LTBU or LTUBSS, and then thread it on.

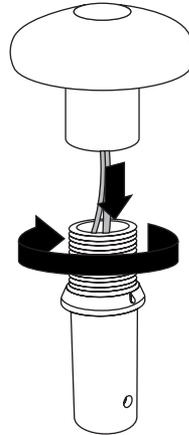


2 Apply marine adhesive sealant to the LTBU or LTBUSS as shown. Be sure to apply around the push pin hole as well.


Insert the LTBU or LTBUSS into the light bar end.

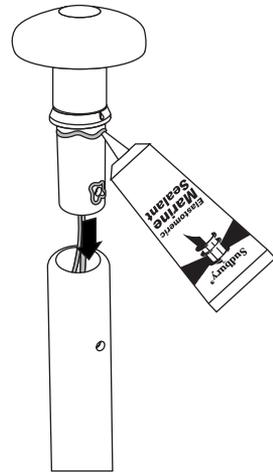

3 Secure the LTBU or LTBUSS with the two black push pins.

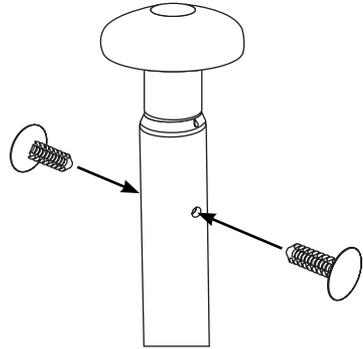

4 When securing make sure that LTBU or LTBUSS is facing forward. To check this line up the notch on the LTBU or LTBUSS with the hole on the back of the light bar as shown.

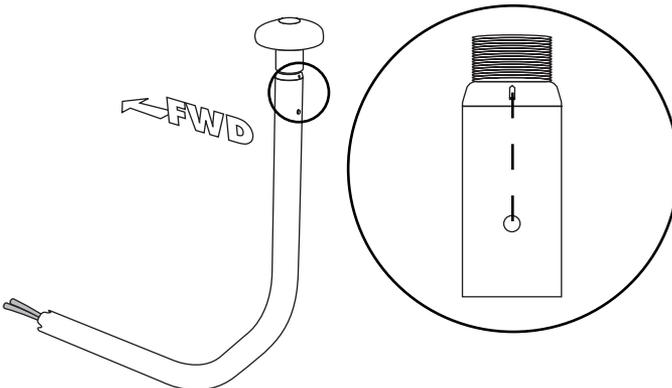

The background of the entire page is a light gray topographic map with white contour lines. The lines are irregular and wavy, representing elevation changes across a landscape. The map is centered and covers the entire area.

SEAVIEW///
ELEVATE YOUR ELECTRONICS

SEAVIEW///

Tel: 800-655-7922
www.seaviewglobal.com

EUROPEAN OFFICE

Tel: +33 4 94 53 27 70
www.seaviewprogress.com

1-101018