


Tender

APPLICABLE PRODUCTS: B921, B922, B923, B924

This is a general guide to show you how simple it is to install an em-trak AIS transceiver. If you have any questions at any time you can contact our team support@em-trak.com

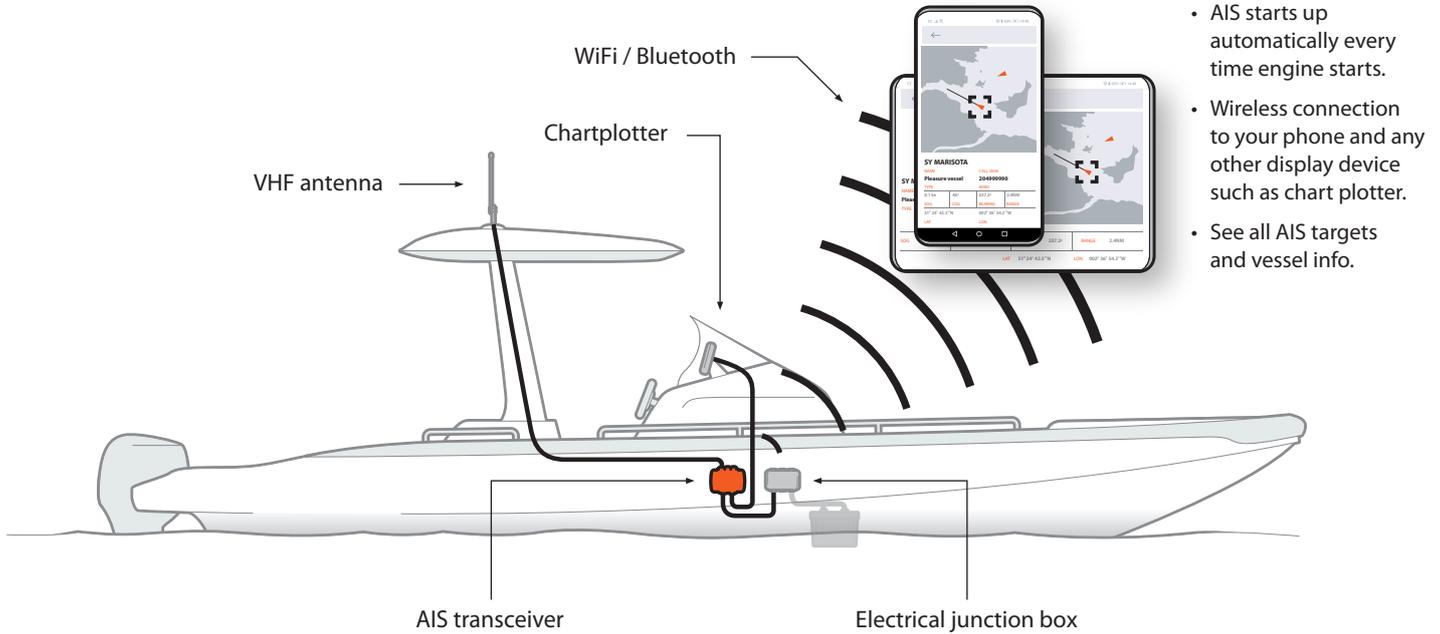

1

No screws required!

Use bracket to fit AIS into convenient storage / utility area.

1

2

3

2

Connect to your VHF radio, VHF antenna and power.

AIS has internal GPS so if you install near a window, under a fibreglass deck or inside a centre console you will not need an external GPS antenna.

VHF antenna

VHF radio

Chartplotter

GPS

AIS transceiver

NMEA0183 & 2000

+/-

Existing Power System Fuse/Junc Box

3

Switch power on and use **CONNECT-AIS** app or **PROAIS2** PC Software to program AIS with your vessel information.

WiFi / Bluetooth

em-trak CONNECT-AIS

Smartphone / Wireless display device

AIS transceiver

NMEA0183 & 2000

+/-

CONNECT-AIS

Download on the App Store

Google play

4

See AIS targets and information on your chartplotter, smart phone and other wireless devices.

WiFi / Bluetooth

NMEA0183 & NMEA2000