

# GARMIN®



## GARMIN BLUENET™ 30 GATEWAY INSTALLATION INSTRUCTIONS

### Important Safety Information

#### ⚠ WARNING

See the *Important Safety and Product Information* guide in the product box for product warnings and other important information.

Failure to install this device according to these instructions could result in personal injury, damage to the vessel or device, or poor product performance.

#### ⚠ CAUTION

To avoid possible personal injury, always wear safety goggles, ear protection, and a dust mask when drilling, cutting, or sanding.

#### NOTICE

When drilling or cutting, always check what is on the opposite side of the surface to avoid damaging the vessel.

### Garmin BlueNet 30 Gateway Overview

The Garmin BlueNet 30 gateway allows you to connect legacy Garmin® Marine Network devices to a Garmin BlueNet chartplotter or network. When installing this gateway, it is important to analyze all of the devices you plan to connect to ensure proper communication. You should read all of these instructions before proceeding. To learn more about Garmin BlueNet network technology, go to [garmin.com/manuals/bluenet](https://garmin.com/manuals/bluenet).

**NOTE:** This gateway is designed for use only when connecting legacy Garmin Marine Network devices to a Garmin BlueNet chartplotter or network. It should not be used if you do not have any Garmin BlueNet chartplotters.



## Mounting Considerations

### NOTICE

This device should be mounted in a location that is not exposed to extreme temperatures or conditions. The temperature range for this device is listed in the product specifications (*Specifications, page 7*). Extended exposure to temperatures exceeding the specified temperature range, in storage or operating conditions, may cause device failure. Extreme-temperature-induced damage and related consequences are not covered by the warranty.

- You must mount the device in a location where it will not be submerged.
- You must mount the device in a location with adequate ventilation so it does not trap heat.
- You must mount the device at least 2.54 cm (1 in.) from cables and other potential sources of interference.
- You must mount the device in a location that allows room for the routing and connection of all cables.
- If needed, you can install this device on an optional mounting bracket that holds a Garmin BlueNet 30 gateway and a Garmin BlueNet 20 switch. Contact your local Garmin dealer or go to [buy.garmin.com](http://buy.garmin.com) to purchase this bracket.

## Mounting the Device

### NOTICE

If you are mounting the device in fiberglass, when drilling the pilot holes, use a countersink bit to drill a clearance counterbore through only the top gel-coat layer. This will help to avoid cracking in the gel-coat layer when the screws are tightened.

Before you mount the device, you must select a mounting location and determine the mounting hardware needed for the surface.

**NOTE:** Mounting hardware is included with the device, but it may not be suitable for the mounting surface.

- 1 Place the device in the mounting location and mark the location of the pilot holes.
- 2 Using a bit appropriate for the surface and the mounting hardware, drill a pilot hole for one corner of the device.
- 3 Loosely fasten the device to the surface with one corner and examine the other three pilot-hole marks.
- 4 Mark new pilot-hole locations if necessary.
- 5 Remove the device from the mounting surface.
- 6 Drill the appropriate pilot holes for the other three marks.
- 7 Secure the device to the mounting location.

## Connection Considerations


When connecting the Garmin BlueNet 30 gateway to power and to other Garmin devices, you should observe these considerations.

### NOTICE

Only one Garmin BlueNet 30 gateway can be installed in a mixed network. Attempting to install more than one gateway in a network will result in poor performance or no communication between devices.

You should connect the Garmin BlueNet 30 gateway to power through the ignition or another physical switch. The device continues to draw power when the system is off and drains the battery if it is connected to it directly.

## Device and Port Overview

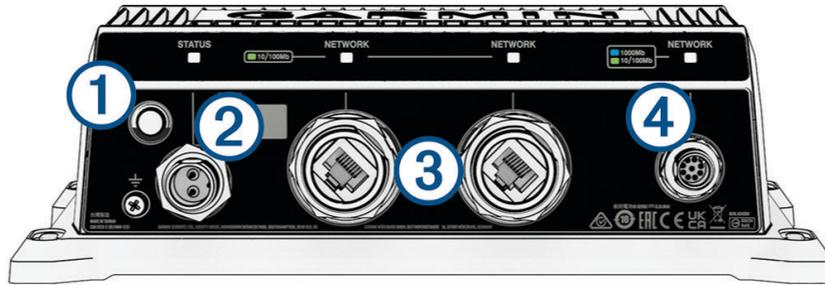

Item	Description	Notes
①	Power button	
②	Power cable port	You must connect this device to a 12 to 24 Vdc power source using the included cable.
③	Garmin Marine Network cable ports	All legacy Garmin Marine Network devices must connect through one of these ports to communicate with Garmin BlueNet devices on the vessel. <b>NOTE:</b> It is not necessary to use both of these network ports if you are using a GMS™ 10 or a chartplotter with multiple network ports to connect your Garmin Marine Network devices.
④	Garmin BlueNet cable port	All Garmin BlueNet devices must connect through this port to communicate with legacy Garmin Marine Network devices on the vessel.
	Optional grounding location	If necessary, you can connect the device to the water ground of the boat to help avoid interference ( <a href="#">Additional Grounding Consideration, page 3</a> ).

## Connecting to Power

### WARNING

When connecting the power cable, do not remove the in-line fuse holder. To prevent the possibility of injury or product damage caused by fire or overheating, the appropriate fuse must be in place as indicated in the product specifications. Connecting the power cable without the appropriate fuse in place voids the product warranty.

You should connect the red wire to the power source through the ignition or another manual switch to turn the device on and off.

- 1 Route the power cable between the power source and the device.
- 2 Connect the red power wire to the ignition or another manual switch, and connect the switch to the positive (+) battery terminal if necessary.
- 3 Connect the black wire to the negative (-) battery terminal or to ground.
- 4 Connect the power cable to the device, and turn the locking ring clockwise to tighten it.

## Additional Grounding Consideration


This device should not need additional chassis grounding in most installation situations. If you experience interference, you can use the grounding screw on the housing to connect the device to the water ground of the boat to help avoid the interference.



## Garmin BlueNet Network Construction Example

Creating a Garmin BlueNet network containing legacy Garmin Marine Network devices may be confusing, and it is critical that the network is constructed correctly in order for all connected devices to communicate effectively. You can use this example to better understand how to properly connect legacy Garmin Marine Network devices to a Garmin BlueNet network.

For more information about Garmin BlueNet network technology, go to [garmin.com/manuals/bluenet](http://garmin.com/manuals/bluenet)

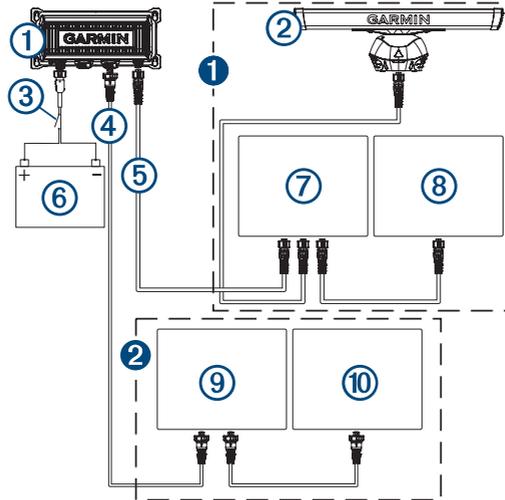

Item	Description	Notes
1	Garmin BlueNet network devices	<p>All Garmin BlueNet network devices must connect to one another or to a Garmin BlueNet 20 switch.</p> <p>Only one Garmin BlueNet network device or Garmin BlueNet 20 switch must connect to the Garmin BlueNet 30 gateway to communicate with the legacy Garmin Marine Network devices.</p> <p>Depending on the types of devices you plan to connect, there are requirements you may need to follow when constructing the network (<a href="#">Specific Garmin BlueNet Device Network Connection Requirements, page 6</a>).</p>
2	Legacy Garmin Marine Network devices	<p>If you have more than two legacy Garmin Marine Network devices, these devices must connect to one another or to a GMS 10 switch.</p> <p>Only one legacy Garmin Marine Network device or GMS 10 switch needs to connect to the Garmin BlueNet 30 gateway to communicate with the Garmin BlueNet network devices.</p> <p>If you have only two legacy Garmin Marine Network devices, you can connect them both to the Garmin BlueNet 30 gateway without first connecting them to one another.</p>

Item	Description	Notes
①	Garmin BlueNet 30 gateway	<p>All Garmin BlueNet network devices must be connected on one "side" of the gateway, and all legacy Garmin Marine Network devices must be connected to the other "side."</p> <p style="text-align: center;"><b>NOTICE</b></p> <p>Only one Garmin BlueNet 30 gateway can be installed in a mixed network. Attempting to install more than one gateway in a network will result in poor performance or no communication between devices.</p>
②	Garmin BlueNet radar	
③	Ignition or power switch (not included)	You should connect the Garmin BlueNet 30 gateway to power through the ignition or another physical switch. The device continues to draw power when the system is off and drains the battery if it is connected directly.
④	Legacy Garmin Marine Network cable	Garmin Marine Network cables have larger connectors that look more like a common RJ45 network connector.
⑤	Garmin BlueNet network cable	<p>Garmin BlueNet network cables have smaller connectors that look more like NMEA 2000® connectors.</p> <p><b>NOTE:</b> Garmin BlueNet network cables are not the same as NMEA 2000 cables, and you cannot use them interchangeably.</p>
⑥	12 Vdc power source	The Garmin BlueNet 30 gateway must connect to power using the included power cable.
⑦	Garmin BlueNet 20 switch or Garmin BlueNet chartplotter	If you are using a Garmin BlueNet 20 switch, the best practice is to connect that switch to the gateway. If you are not using a switch, you can connect a chartplotter with multiple Garmin BlueNet network ports or a single Garmin BlueNet chartplotter to the gateway, depending on the types of devices on your vessel.
⑧	Garmin BlueNet chartplotter or other device	<b>NOTE:</b> You must have at least one Garmin BlueNet chartplotter on the boat. The Garmin BlueNet 30 gateway is not necessary without a Garmin BlueNet chartplotter.
⑨	GMS 10 switch or legacy Garmin Marine Network chartplotter	If you are using a GMS 10 switch, it is the best practice to connect that switch to the gateway. If you are not using a switch, you can connect a chartplotter with multiple legacy Garmin Marine Network ports or up to two single legacy Garmin Marine Network devices to the gateway, depending on the types of devices on your vessel.
⑩	Legacy Garmin Marine Network chartplotter or other device	

## Specific Garmin BlueNet Device Network Connection Requirements

When connecting devices to a Garmin BlueNet network, you should follow these requirements for specific devices that may be present in the network.

- OnDeck™ GTB 10 hub:
  - You must connect an OnDeck GTB 10 hub to a Garmin BlueNet chartplotter or Garmin BlueNet 20 switch.
  - You must use the proper Garmin BlueNet network to RJ45 adapter cable (010-12531-01) to connect an OnDeck GTB 10 to a Garmin BlueNet chartplotter or Garmin BlueNet 20 switch.
- Fusion® network stereos:
  - If you have connected multiple compatible Fusion stereos together using Fusion PartyBus™ networking technology and you want to connect one of them to a chartplotter, you should connect one of the stereos or a switch dedicated to the Fusion PartyBus network stereos to a Garmin BlueNet chartplotter or Garmin BlueNet 20 switch for the best performance.
  - You should use the proper Garmin BlueNet network to RJ45 adapter cable (010-12531-02) to connect a Fusion network stereo to a Garmin BlueNet chartplotter or Garmin BlueNet 20 switch.
- Third-party IP cameras:
  - All compatible third-party IP cameras should connect to a Garmin BlueNet chartplotter or Garmin BlueNet 20 switch for the best performance.  
**NOTE:** If you presently have an IP camera installed and connected to a legacy Garmin Marine Network chartplotter on your boat, it is not necessary to disconnect it and rewire the camera so it can connect to a Garmin BlueNet chartplotter. If you have removed all legacy Garmin Marine Network chartplotters, however, you must connect the camera to a Garmin BlueNet chartplotter or Garmin BlueNet 20 switch.
  - Although it is necessary to install a PoE isolation coupler when connecting a third-party IP camera to a legacy Garmin Marine Network device, this isolation coupler is not required when connecting a third-party IP camera to a Garmin BlueNet chartplotter or Garmin BlueNet 20 switch.
  - You should use the proper Garmin BlueNet network to RJ45 adapter cable (010-12531-02) to connect a compatible third-party IP camera to a Garmin BlueNet chartplotter or Garmin BlueNet 20 switch.
- Garmin devices with small network connectors:
  - A number of Garmin devices were produced with small network connectors prior to the introduction of Garmin BlueNet network technology, and these devices were packaged with an adapter that allowed them to function on a legacy Garmin Marine Network.
  - All Garmin devices with small network connectors should connect to a Garmin BlueNet chartplotter or Garmin BlueNet 20 switch for the best performance.  
**NOTE:** If you presently have a Garmin device with a small network connector installed and connected to a legacy Garmin Marine Network chartplotter or GMS 10 switch on your boat, it is not necessary to disconnect it and rewire the device so it can connect to a Garmin BlueNet chartplotter. These devices will continue to function as expected when connected through the Garmin BlueNet 30 gateway, although it is preferable to connect to a Garmin BlueNet chartplotter or Garmin BlueNet 20 switch if the installation allows for it.
  - You should not use the adapter packaged with the device to connect it to a legacy Garmin Marine Network device before connecting to the Garmin BlueNet 30 gateway. Connect the device directly to a Garmin BlueNet chartplotter or Garmin BlueNet 20 switch using a Garmin BlueNet network cable.
  - The first time you perform a marine software update on a connected Garmin BlueNet chartplotter, all of the connected devices will be updated to communicate properly on the Garmin BlueNet network.

## Specifications

Material	Polycarbonate plastic and die-cast aluminum
Dimensions (W x H x D)	293.3 × 72 × 112.6 mm (9 <sup>7</sup> / <sub>16</sub> × 2 <sup>13</sup> / <sub>16</sub> × 4 <sup>7</sup> / <sub>16</sub> in.)
Weight	0.5 kg (1 lb. 2 oz.)
Operating temperature range	From -15° to 70°C (from 5° to 158°F)
Water rating	IEC 60529 IPX7 <sup>1</sup>
Power input	From 10 to 32 Vdc
Fuse	2 A
Max. power usage	2.3 W
Typical current draw	12 Vdc: 150 mA 24 Vdc: 90 mA
Max. current draw	200 mA
Compass-safe distance	10 cm (4 in.)

## 联系信息

制造厂商：台湾国际航电股份有限公司

销售厂商：上海佳明航电企业管理有限公司

联络地址：上海市徐汇区桂平路 391 号（新漕河泾国际商务中心 A 座 37 层）

电话：021-60737675

客服专线：400-819-1899

## 連絡地址

製造銷售：台灣國際航電股份有限公司

聯絡地址：新北市汐止區樟樹二路 68 號

電話：(02)2642-8999

客服專線：(02)2642-9199

<sup>1</sup> The device withstands incidental exposure to water of up to 1 m for up to 30 min. For more information, go to [www.garmin.com/waterrating](http://www.garmin.com/waterrating).

## 物質宣言

部件名称	有毒有害物质或元素									
	铅	汞	镉	六价铬	多溴联苯	多溴二苯醚	邻苯二甲酸二(2-乙基己)酯	邻苯二甲酸丁苄酯	邻苯二甲酸二丁酯	邻苯二甲酸二异丁酯
印刷电路板组件	✗	○	○	○	○	○	○	○	○	○
金属零件	✗	○	○	○	○	○	○	○	○	○
电缆 电缆组件 连接器	✗	○	○	○	○	○	○	○	○	○
塑料和橡胶零件	○	○	○	○	○	○	○	○	○	○

本表格依据 SJ/T11364 的规定编制。

○: 代表此种部件的所有均质材料中所含的该种有害物质均低于 (GB/T26572) 规定的限量

✗: 代表此种部件所用的均质材料中, 至少有一类材料其所含的有害物质高于 (GB/T26572) 规定的限量

\* 该产品说明书应提供在环保使用期限和特殊标记的部分详细讲解产品的担保使用条件。



产品

© 2023 Garmin Ltd. or its subsidiaries

Garmin® and the Garmin logo are trademarks of Garmin Ltd. or its subsidiaries, registered in the USA and other countries. Garmin BlueNet™ is a trademark of Garmin Ltd. or its subsidiaries. These trademarks may not be used without the express permission of Garmin.

MN: A04359

航海網路設備