

The World's Leading RV Waste Pump — Just Got Better!



Model 18550 000

FEATURES

- Neat and clean way to quickly evacuate waste tanks
- Empty black-water and grey-water Holding Tanks at home
- Grinds waste as it pumps
- New Feature: Built-in Impeller Protection Device... longer life!
- Flow of up to 13 GPM for fast, clean Holding Tank evacuation

The RV Macerator Pump from Flojet

Designed to add flexibility to Holding Tank service. With the Flojet Waste Pump you can not only empty the black and grey water tanks at the conventional Dump Station, but also down a toilet, into your house sewer clean-out, septic tank or into a mobile waste wagon.

The Flojet macerator pump will empty a typical 30-gallon holding tank in less than three minutes. The time increases somewhat as the distance pumped is increased beyond 25 feet. The pump will macerate and pump all waste and tissue normally found in RV waste systems. The same high quality Jabsco design found in boat stores worldwide.

Put an end to handling and rinsing a dirty 3" sewer hose; instead use a cleaner, easier to handle garden hose. Now you can pump up hill, and around corners. The RV waste pump will simplify and improve your RV experience!




Also ask about the new Portable RV Waste Pump model 18555-000A.

Flojet

FLOJET®

DIMENSIONAL DRAWING Inches (Millimetres)

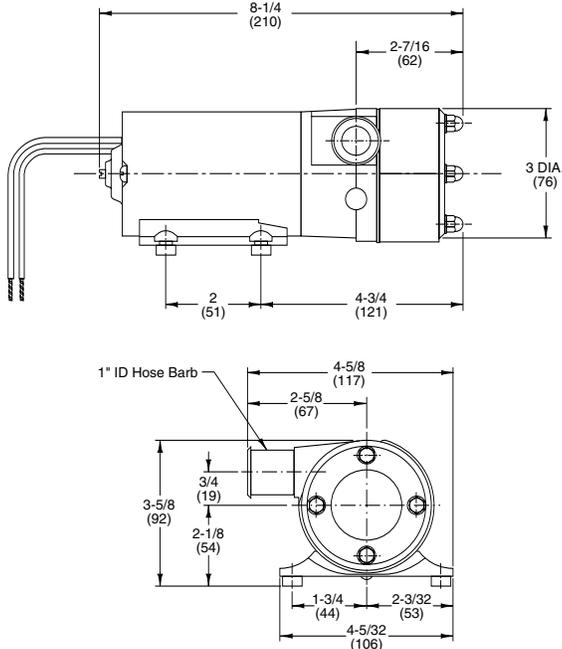

SPECIFICATIONS

- Model No.:** 18550-000A
UPC-A: 7 0547425000 4
Pump: Self-Priming Flexible Impeller with Stainless Steel Wearplate
Impeller: "Jabsco Nitrile" compound
Macerator: Stainless Steel Cutter reduces particle size to 1/8" (3mm) maximum
Seal: Lip Type
Ports: Inlet RV model – 3" (76mm) hose
 Outlet - 1" (19mm) Hose Barb
Motor: Permanent Magnet Type, Fully Enclosed, with Stainless Steel Shaft Includes Impeller Protection Device that shuts-off pump after 20 seconds of run-dry
Complies with USCG Regulation 183.410 & ISO 8846 MARINE for Ignition Protection
Weight: 3.5 lb (1.6 kg) Approx.


HEAD CAPACITY TABLE*

	Discharged Head		AMPS			
	Ft	Metres	GPM	LPM	12 Volt	24 Volt
Free flow	0		12.5	47	14.0	7.6
5	1-1/2		11.5	44	14.5	7.8
10	3		10.5	40	15.0	8.1
15	4-1/2		9.0	34	16.0	8.6
20	6		7.5	28	16.5	8.9

*Flow rates and amperage will vary slightly depending on pump loading (sanitation system design).

IMPELLER RELEASE FEATURE

After long periods of non-use, a stuck impeller can be easily broken loose with a screwdriver inserted in motor shaft slot. Simply turn shaft clockwise as shown.

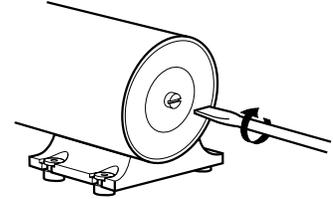


EASY TO INSTALL

Because it is self-priming, it may be located up to four feet above the tank liquid level. The intake port is designed to accept a 3" ID slip-on hose and the discharge port will accept a 1" ID hose. When installed, the macerator can be used to empty the holding tank into any convenient sewer receiver such as a sewer clean-out at your home.

APPLICATIONS

- Empty holding tanks and avoid dump stations
- Transfer waste from recirculating toilets to main holding tank

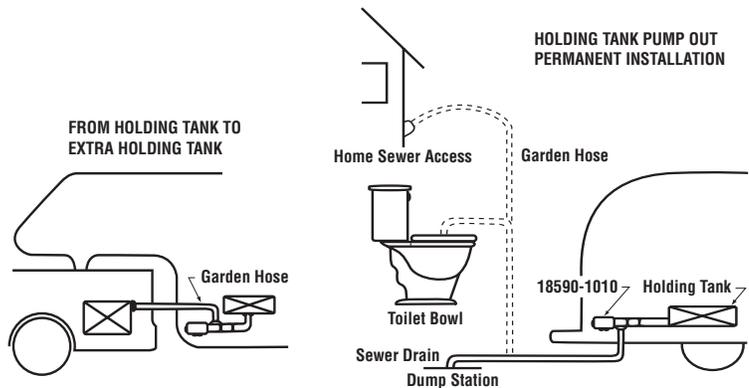

USA

Flojet
 Tel: 949.859.4945
 Fax: 949.859.1153

UK

Flojet
 Tel: +44 1908 370088
 Fax: +44 1908 373731

CANADA

Fluid Products Canada
 Tel: 519.821.1900
 Fax: 519.821.2569

GERMANY

Jabsco GmbH
 Tel: +49-40-53 53 73-0
 Fax: +49-40-53 53 73-11

JAPAN

NHK Jabsco Company Ltd.
 Tel: 045.4758906
 Fax: 045.4758908