



TM256

Furuno model #525T-TMD


Transom Mount Transducer

1kW Dual-Frequency 50kHz/200kHz

- High performance 1kW transom mount at a moderate price.
- Four dual-frequency elements provide:
 - Sixteen times the sensitivity of 600W single element transducers
 - Handles up to 1.2 kW RMS of power
- Narrow beamwidth at both 50kHz and 200kHz provides good target definition
- Transducer is internally shielded to suppress EMI/RFI interference
- Fast response temperature sensor provides $\pm 0.2^{\circ}\text{C}$ accuracy

Unique mounting bracket offers **two** operating positions:

- Lowered position operates at all speeds and has impact release feature
- Raised position provides no drag at planing speeds, yet provides excellent fishfinding at low speeds

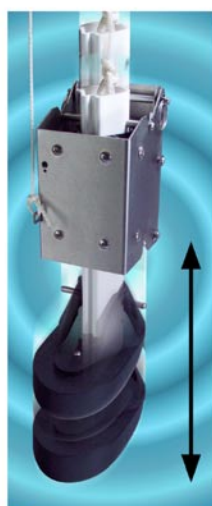

- Bracket and transducer can be removed from transom within a minute

